

Battery-operated CO Alarm

www.hwsensor.com

CM022

APPLICATION

CM022 carbon monoxide alarm uses a high-quality electrochemical sensor, which is fast and sensitive to carbon monoxide. The current carbon monoxide concentration value can be read through the display. When the carbon monoxide concentration in the air is higher than the preset value, the user will be alerted by sound and light alarm to ensure their safety.

12 12 NORMAL FAULT ALARM Hanwei

FEATURES

- · Meet EN50291 standard
- · High quality electrochemical Sensor
- · New fashion design
- · LCD display












EN 50291-1:2018

APPLICATION

The CM022 is used to detect carbon monoxide leakage in residential home. Fast response to carbon monoxide and reminding people get away from danger.

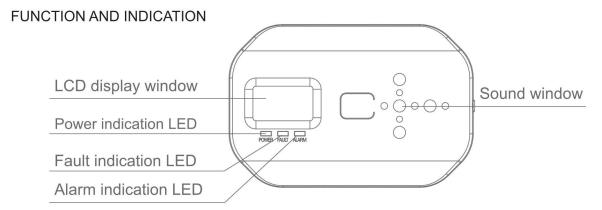

SPECIFICATIONS

Measuring gas	Carbon Monoxide	Alarming level	Follow EN50291 standard
Working voltage	DC3V	- Working Environment	Temperature: -10°C ~ 50°C
Sensor type	Electrochemical sensor		Humidity: <95%RH
Sensor life	≥10 years	Alarm sound	≥85dB(3m)

Welcome to Hanwei!



汉威科技集团股份有限公司 Hanwei Electronics Group Corporation

ADD: No.169 Xuesong Road, National & High Tech Zone, Zhengzhou 450001, Henan, China P.C: 450001

www.hwsensor.com

TEL: 86-371-67169070 / 80 FAX: 86-371-67169090

E-mail: sales@hwsensor.com