



AC Powered Carbon Monoxide Detetor GT

GT

FEATURES

- AC or DC powered
- Valve output and relay output function
- Sensor module design, easy to change, repair and calibrate
- Big flashing window

APPLICATION


GT- CO Alarm can be used to detect the leakage of carbon monoxide in your houses, apartments, boat and caravan.



SPECIFICATIONS

Measuring gas	Carbon Monoxide	Response time	≤30s Resume automatically
Working voltage	① AC220V±15% / AC110V±15% 50Hz ② DC12V	Alarming level	Follow EN50291 standard
		Sound level	≥85dB
Environment	Temperature: 0°C ~ 55°C Humidity: < 95%	Optional function	<input type="checkbox"/> gas shut off valve <input type="checkbox"/> relay output

STRUCTURES

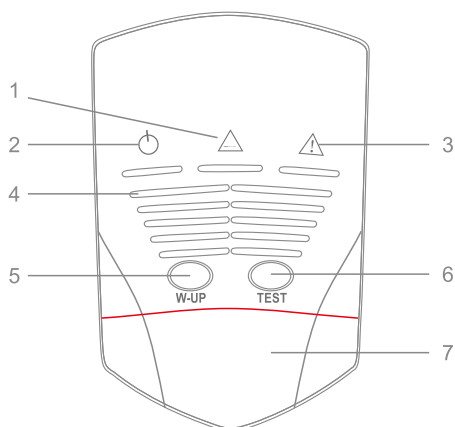

- | | |
|------------------------|---|
| 1 POWER Light (Green) | 5 W-UP Button: press to stop the warm up. |
| 2 W UP Light (Yellow) | 6 TEST Button: press to test alarm function |
| 3 FAULT Light (Yellow) | 7 ALARM Light (Red) |
| 4 Air vents | |

Gas detector GT

FEATURES

- Popular design
- Optional valve and relay output
- Fast response to natural gas or LPG

APPLICATION

The GT gas alarm is a kind of wall-mounted household gas alarm. It provides visual and audible signals when the gas concentration reaches the presetting range, and reminds you to take prompt favorable action.

SPECIFICATIONS

Measuring gas	Natural gas or LPG	Working Environment	Temperature: -10°C ~ 50°C Humidity: <95%RH
Working voltage	AC220V±15%/AC110V±15% 50Hz~60Hz		
Sensor life	>3 years	Alarm sound	≥85dB(1m)
Alarming level	10%LEL	Optional function	<input type="checkbox"/> gas shut off valve <input type="checkbox"/> relay output

Welcome to Hanwei !



汉威科技集团股份有限公司
Hanwei Electronics Group Corporation

ADD: No.169 Xuesong Road,National&HighTech Zone,
Zhengzhou 450001, Henan, China P.C: 450001

www.hwsensor.com
TEL: 86-371-67169070 / 80
FAX: 86-371-67169090
E-mail: sales@hwsensor.com