

## AC Powered Carbon Monoxide Detetor GT

### GT

#### FEATURES

- AC or DC powered
- Valve output and relay output function
- Sensor module design, easy to change, repair and calibrate
- Big flashing window

#### APPLICATION


GT- CO Alarm can be used to detect the leakage of carbon monoxide in your houses, apartments, boat and caravan.

#### SPECIFICATIONS

Measuring gas	Carbon Monoxide	Response time	≤30s Resume automatically
Working voltage	① AC220V±15% / AC110V±15% 50Hz ② DC12V	Alarming level	Follow EN50291 standard
		Sound level	≥85dB
Environment	Temperature: 0°C ~ 55°C Humidity: < 95%	Optional function	<input type="checkbox"/> gas shut off valve <input type="checkbox"/> relay output



#### STRUCTURES

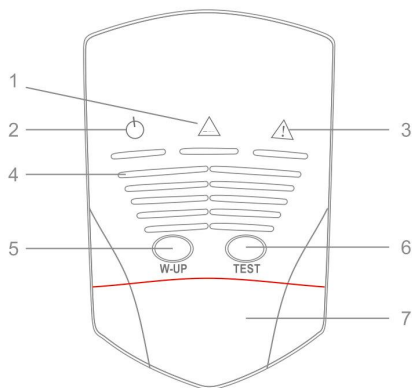

- |                        |   |
|------------------------|---|
| 1 POWER Light (Green)  | 5 W-UP Button: press to stop the warm up.   |
| 2 W UP Light (Yellow)  |   |
| 3 FAULT Light (Yellow) | 6 TEST Button: press to test alarm function |
| 4 Air vents            | 7 ALARM Light (Red)                         |

### Gas detector GT

#### FEATURES

- Popular design
- Optional valve and relay output
- Fast response to natural gas or LPG

#### APPLICATION

The GT gas alarm is a kind of wall-mounted household gas alarm. It provides visual and audible signals when the gas concentration reaches the presetting range, and reminds you to take prompt favorable action.

#### SPECIFICATIONS

Measuring gas	Natural gas or LPG	Working Environment	Temperature: -10°C ~ 50°C Humidity: <95%RH
Working voltage	AC220V±15%/AC110V±15% 50Hz~60Hz		
Sensor life	>3 years	Alarm sound	≥85dB(1m)
Alarming level	10%LEL	Optional function	<input type="checkbox"/> gas shut off valve <input type="checkbox"/> relay output

**Welcome to Hanwei !**