

Smoke Detector

www.hwsensor.com



JTY-GF-YB030


FEATURES


- EN14604 Approval by TUV
- Photoelectric Technology
- Delicate new design
- · DC 9V alkaline battery


APPLICATION

YB030 is an independent smoke detector which can detect smoke in fire ground and give alarm signal immediately.

STRUCTURES








INSTALLATION

Please install the smoke alarm to the places of which the smoke shall be easily sensed, normally we put it on the ceiling. Install the base: Install the base on the ceiling by using the screw

Install the smoke alarm: Firstly take the battery off, then insert the connector of the battery into the hole and put the battery again. Put the smoke alarm on the base and twirl it clockwise until it fit the base completely

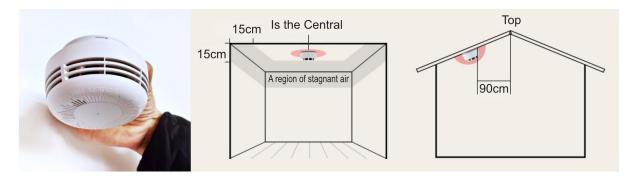

SPECIFICATIONS

Product name	Independent photoelectric smoke fire detection alarm	Battery life	≥ 1 year
		working temperature	-10°C~+55°C
Product model	JTY-GF-YB030	relative humidity	≤95%RH
working voltage	DC 9V (alkaline battery; 6LR61; 500mah)	Alarm classification	Fire alarm, fault alarm and low power alarm
Alarm mode	Audible&visual alarm	Executive standard	EN 14604 : 2005
Alarm sound	≥85dB@3m	Product size	Ф90mm×H56mm

Welcome to Hanwei!



汉威科技集团股份有限公司 Hanwei Electronics Group Corporation

ADD: No.169 Xuesong Road, National & High Tech Zone, Zhengzhou 450001, Henan, China P.C: 450001

www.hwsensor.com

TEL: 86-371-67169070 / 80 FAX: 86-371-67169090

E-mail: sales@hwsensor.com