

Natural gas or LPG alarm

www.hwsensor.com

JT-KL Gas Alarm

APPLICATION


JT-KL gas alarm is a kind of wall-mounted household gas alarm designed to detect the concentration of combustible gas or vapors using high quality air-sensitive component and manufactured with advanced technology. It provides visual and audio signals when the gas concentration reaches the presetting alarm range, and reminds you taking prompt favorable action. You may start up other link equipment, open windows or shut off gas supply to avoid fire, explosion, suffocation, or other malignant accidents.

Hanwei Group Fault Fault Fault Test

FEATURES

- · Sensor lifespan 7 years
- · High sensitivity and fast response
- Easy installation
- · Compliance with EN50194-1:2009

FUNCTION AND INDICATION

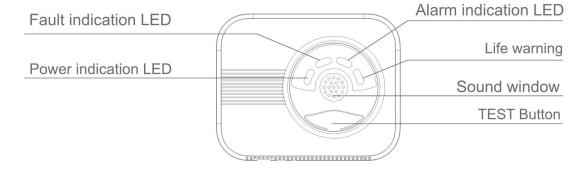

SPECIFICATIONS

Model	JT-KL	Alarm Value	8%LEL
Working voltage	AC220V±15% 50Hz	Alarming Method	visual and audio
Power Consumption	≤1.2W	Sound level	≥70dB
Environment	Temperature: -10°C ~ 55°C	Weight	190g
	Humidity: <93%	Dimension	I×b×h, mm: 108×86×36
Response time	≤30s Resume automatically	Optional function	□gas shut off valve
Gas Sampling	diffuse naturally		□relay output

Welcome to Hanwei!



汉威科技集团股份有限公司 Hanwei Electronics Group Corporation

ADD: No.169 Xuesong Road, National & High Tech Zone, Zhengzhou 450001, Henan, China P.C: 450001

www.hwsensor.com

TEL: 86-371-67169070 / 80 FAX: 86-371-67169090

E-mail: sales@hwsensor.com